




Fohhn
colors of sound

Datasheet


Arc AT-07

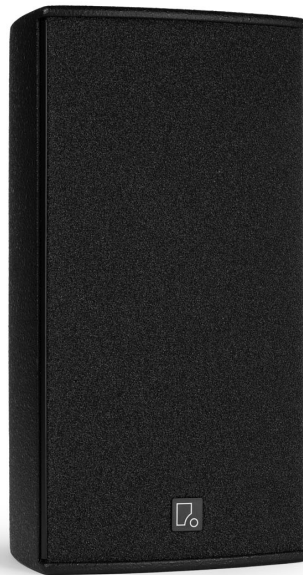


Arc AT-07

The AT-07 is a passive fullrange speaker for fixed installations. It impresses with its high performance capacity and compact dimensions.

In addition to outstanding technical features, the models of the Arc series are generally characterized by their attractive design.



- 6.5" / 1" compression driver on rotatable CD horn, electronic high frequency protection
- Nominal power rating: 150 watts at 16 ohms
- Dispersion: 90 ° x 60 ° (H x V)
- SPL max.: 123 dB
- Dual connection panel: Speakon and 4-pole connector (inside, with cable outlet)
- High-quality wooden enclosure (multiplex birch)
- Available in RAL Classic, NCS or Pantone colors on request
- Optionally available with weatherproof PU coating
- Various mounting options
- In order to ensure performance and operational safety, Fohhn system amplifiers including the correct speaker preset are required.



Available with the following color options



Black

Equipped with the following Fohhn technologies



100 V optional



Special colors optional



Ball impact resistant

Technical data

Electroacoustic features

acoustic design	passive loudspeaker, 2-way, vented design
power rating (nominal)	150 watts
power rating (program)	300 watts
power rating (peak)	600 watts
components	6,5" / 1" on rotatable CD-horn, with self-resetting Polyswitch-HF protection
sensitivity	96 dB
maximum SPL	123 dB
frequency range	65 Hz – 20 kHz
2-way design	yes
nominal impedance	16 ohm
nominal dispersion (h × v)	90° x 60°

Physical features

enclosure	multiplex birch plywood, reinforced with steel braces
connectors	1 x Neutrik NL4 Speakon and 4-pole connector inside
dimensions (w × h × d)	approx. 195 x 380 x 230 mm
weight	approx. 7 kg
standard colors	textured finish black or white
front design	acoustic foam, same colour as enclosure
protection grille	steel grille, ball impact resistant, powder coated
mounting points	9 x M6 thread

Optional features

special colors	RAL Classic / NCS / Pantone on request
integrated 100 V transformer	60 W / 30 W / 15 W
optional weather protection	polyurethane coating, water-repellent speaker cone impregnation

CAAD simulation data

simulation data	EASE, CLF, Ulysses, Fohhn Designer
-----------------	------------------------------------

power rating (nominal/program): according to IEC-60268-5 (long term/short term)
power rating (peak); maximum SPL: peak, 20 ms with bandpass filtered pink noise signal according to IEC 60268-2 at one octave above the lower limit of the frequency range, with speaker preset
sensitivity: 2,83 V at 8 ohms (2 V at 4 ohms, 4 V at 16 ohms) at a distance of 1 m under anechoic fullspace conditions
frequency range: -10 dB under anechoic halfspace-conditions with speaker preset
weight: net weight without optional equipment
nominal dispersion: -6 dB compared to the main dispersion axis

Fohhn Audio AG
Großer Forst 15
72622 Nürtingen
Germany

Phone +49 7022 93323-0
Fax +49 7022 93324-0
www.fohhn.com
contact@fohhn.audio



Fohhn Audio AG reserves the right to make changes to its product design and technology without notice. All information is subject to change.
© 2026, Fohhn Audio AG, Germany.

Document version: 2026-01-29 11:50:27