


MISSION CONTROL KEYBOARD AN-CTK-01


It is a full-featured, easy operation control keyboard, support both network control and analog control, can be widely used for video conferencing, live streaming, broadcasting, video surveillance etc.

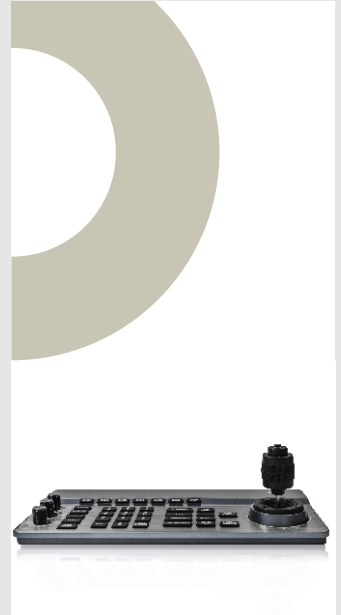


PRODUCT FEATURES:

- ⊙ Support multiple control ports: LAN, RS232, RS422, and RS485.
- ⊙ Support multiple control protocols: Visca Serial, PELCO-P, PELCO-D, VISCA over IP, VISCA TCP, VISCA UDP, ONVIF, NDI etc.
- ⊙ Multiple cameras can be controlled via one keyboard, and one camera can be controlled via multiple keyboards as well.
- ⊙ Adapts four-dimensional joystick to enable the control of the video camera PTZ movement smoothly and flexibly.
- ⊙ With 3.12-inch OLED screen to display all setting information.
- ⊙ Support to set different levels of operation permissions via OSD menu.
- ⊙ Support button keys backlight, enable users to choose automatic backlight in low light or dark environment.
- ⊙ Support to set, run or clear presets.
- ⊙ Support daisy chain function.
- ⊙ Support camera OSD menu setting.
- ⊙ Support standard POE (Power Over Ethernet).
- ⊙ Support up to 7 camera shortcut control buttons, to make camera control convenient and fast, improves switching speed between multiple cameras.
- ⊙ Support 10M, 100M, 1000M adaptive network RJ45 connection.

Input/Output Interface:

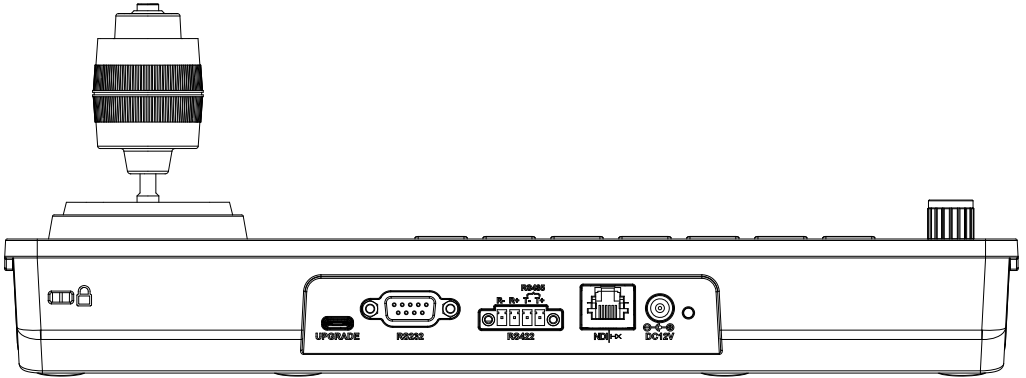

Dimension (unit:mm)

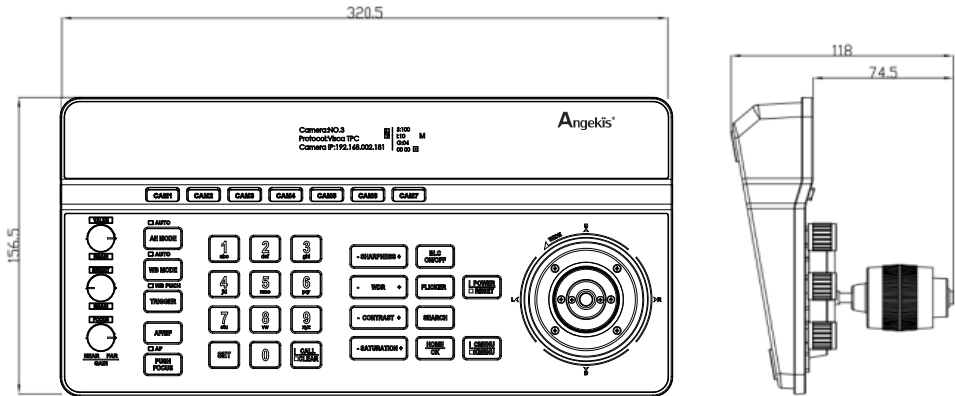

Technical Specs

Model	AN-CTK-NDI
Control Ports	RJ45, RS232, RS422, RS485
RJ45	Ethernet port, POE (IEEE802.3af)
RS232	DB9 Male head
RS422	3.81 Spacing terminal, T+, T-, R+, R-
RS485	3.81 Spacing terminal, T+, T-
Control Protocols	VISCA Serial、PELCO-P、PELCO-D、VISCA over IP、VISCA TCP、VISCA UDP、ONVIF、NDI
Upgrade Port	Type-C
LCD Screen	3.12-inch OLED screen, blue light, 256 × 64 pixel
Working Power	12V, 1A
Working Temperature	-10℃~50℃
Working Humidity	20%~80%
Storage Temperature	-20℃~60℃
Storage Humidity	0~90%
Dimension	320.5mm × 156.5mm × 118mm
Net Weight	1.05kg