

touchCUE-12

Wired Tabletop Touch Panel 12.1"



Main Features

- Edge-to-edge front glass
- Slim aluminium unibody enclosure
- Integrated tabletop stand
- 12.1" TFT LCD touch screen display with wide viewing angles
- Resolution 1 280 x 800 pixels
- Display colors 32-bit (True Color)
- Projected capacitive touch overlay
- Video preview
- Single cable Ethernet connection
- Power over Ethernet Plus power supply
- Built-in microphone, speakers, light and proximity sensors

Description

The touchCUE-12 is wired tabletop touch panel offering clean modern design with edge-to-edge front glass and sleek aluminium body with tabletop stand. It is ideal front-end for any tabletop applications. Fully compatible with CUE controllers and interfaces, this touch panel provides the ultimate one-touch solution for meeting rooms, conference rooms, boardrooms and high-tech homes.

The 12.1" color touch screen display offers resolution 1280 x 800 pixels and it produces stunning true color images. Touch panel has projected capacitive touch overlay. Single cable Ethernet connection provides easy network integration. The touch panel is equipped with Power over Ethernet Plus (PoE+) technology enabling an Ethernet network cable to deliver both data and power.

Installation


Slim and low profile design sits perfectly on a table without obstructing views. Delivered flat Ethernet cable provides sleek single cable connection and the network connector is hidden in a tabletop stand.



Application Diagrams

The following diagram describes the use of touch panel with controller and IP interfaces. In this case the touch panel serves as graphic user interface only.

The following diagram describes the use of touch panel with IP interfaces only. This configuration allows to create cost effective distributed control solution where touch panel serves as controller and graphic user interface in one box. In Cue Visual Composer touch panels and controllers are programmed in the same way, which makes possible to use touch panels as fully functional control units.

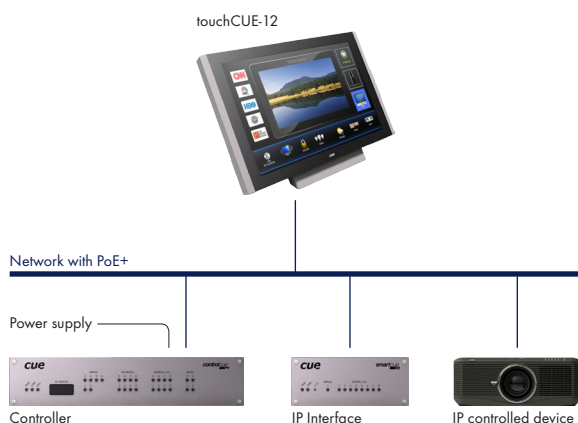

touchCUE-12

Wired Tabletop Touch Panel 12.1"



Specifications

Touch-screen display

Color a-Si TFT LCD with LED backlight
Size 12.1" / 307.3 mm diagonal, wide screen
Resolution 1 280 x 800 pixels
Display colors 32-bit (True Color)
Transparency 8-bit Alpha blending
White luminance 400 cd/m2
Response time 15 ms
Contrast ratio 1000 : 1
Pixel pitch 0.204 x 0.204 mm
Pixel density 125 ppi
Viewing angle $\pm 80^\circ$ horizontal, $\pm 80^\circ$ vertical
Projected capacitive touch overlay
Edge-to-edge glass

Built-in sensors

Light sensor for automatic backlight dimming
Proximity sensor for automatic backlight switching on

Buttons

System Default

Memory

512 MB RAM
microSD Card min. 8 GB

Software

XPL² runtime for application created in Cue Visual Composer
Admin Web for setup

Video

Streaming video preview
Formats: MJPEG, H.264

Audio

Built-in microphone
Built-in speakers

Wired communication

10/100 BaseT LAN, RJ-45 connector

Power supply

Power over Ethernet Plus (PoE+), IEEE 802.3at compatible



Physical

Sleek aluminium body, edge-to-edge front glass
Integrated tabletop stand, fixed angle 58°
Dimensions 320 x 192 x 153 mm / 12.6" x 7.6" x 6.0"
Weight 2.4 kg / 5.3 lb

Environment conditions

Operating temperature 10° to 40° C
Storage temperature 0° to 60° C
Relative humidity 10% to 90% non-condensing

Mechanical Description

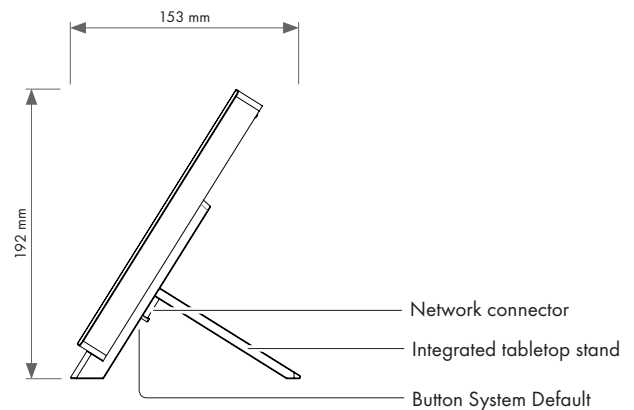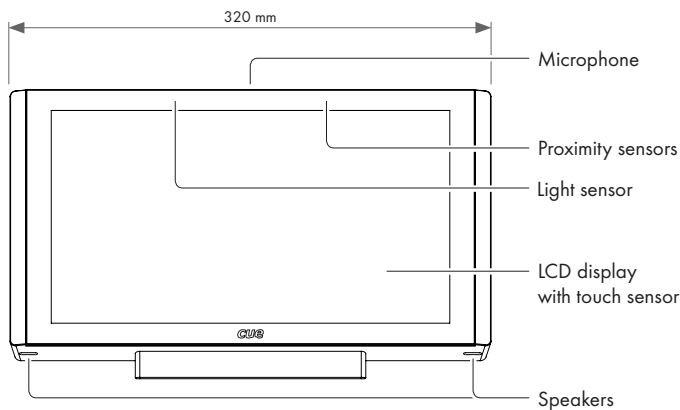

Box Contents

Touch panel touchCUE-12
Power supply with PoE+ injector
Flat Ethernet cable
Cleaning tissue

Data Sheet
Declaration of Conformity
Cue System Connector Wiring Sheet

Order Information

Product code CS0466