

touchCUE-7-M

Wired On-Wall Touch Panel 7"



Main Features

- Edge-to-edge front glass
- Slim aluminium unibody enclosure
- 7" a-Si TFT touch screen display with wide viewing angles
- Resolution 1 280 x 800 pixels
- Pixel density 216 ppi
- Display colors 32-bit (True Color)
- Projected capacitive touch overlay
- Video preview
- Single cable Ethernet connection
- Power over Ethernet power supply
- Built-in microphone, speakers, light and proximity sensors
- Multisurface installation, e.g. glass wall
- Compatible with VESA standard 75 x 75 mm

Description

The touchCUE-7-M is wired built-in touch panel offering clean modern design with edge-to-edge front glass and sleek aluminium body. It is ideal front-end for any on-wall applications. Fully compatible with CUE controllers and interfaces, this touch panel provides the ultimate one-touch solution for meeting rooms, conference rooms, boardrooms and high-tech homes.

The 7" active matrix touch screen display offers resolution 1 280 x 800 pixels and it produces stunning true color images. Touch panel is equipped with projected capacitive touch overlay. Single cable Ethernet connection provides easy network integration. The touch panel is equipped with Power over Ethernet (PoE) technology enabling an Ethernet network cable to deliver both data and power.

The touch panel installs easily on the wall using adhesive foil or screws. Cable bushings are prepared for network cable installation from left or right side as well as from the bottom. Hole for network cable is prepared on rear side too. When installed the touch panel protrudes 23 mm from the mounting surface.




Installation using adhesive foil is typically used for a glass wall. Delivered adhesive foil is installed on the wall and then touch panel is attached by adhesive tape installed on the rear side of the back cover.



Installation using screws can be used for wooden walls, furniture as well as for holders compatible with VESA standard 75 mm x 75 mm. Four holes are prepared on the rear side of the back cover.

Application Diagrams

The following diagram describes the use of touch panel with controller and IP interfaces. In this case the touch panel serves as graphic user interface only.

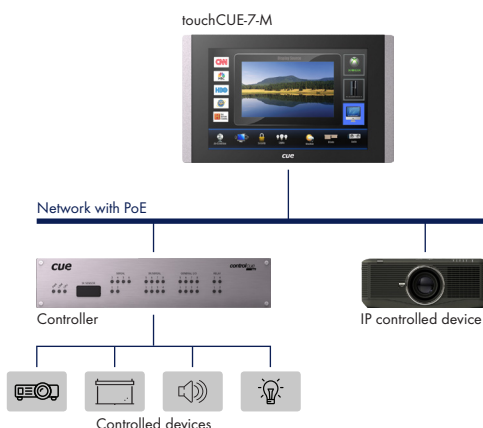

The following diagram describes the use of touch panel with IP interfaces only. This configuration allows to create cost effective distributed control solution where touch panel serves as controller and graphic user interface in one box. In Cue Visual Composer touch panels and controllers are programmed in the same way, which makes possible to use touch panels as fully functional control units.



touchCUE-7-M

Wired On-Wall Touch Panel 7"

cue

Specifications

Touch-screen display

Color a-Si TFT LCD with LED backlight
Size 7" / 177.8 mm diagonal, wide screen
Resolution 1 280 x 800 pixels
Display colors 32-bit (True Color)
Transparency 8-bit Alpha blending
White luminance 400 cd/m²
Response time 20 ms
Contrast ratio 800 : 1
Pixel pitch 0.116 x 0.116 mm
Pixel density 216 ppi
Viewing angle $\pm 80^\circ$ horizontal, $\pm 80^\circ$ vertical
Projected capacitive touch overlay
Edge-to-edge glass

Built-in sensors

Light sensor for automatic backlight dimming
Proximity sensor for automatic backlight switching on

Buttons

System Default

Memory

512 MB RAM
microSD Card min. 8 GB

Software

XPL² runtime for application created in Cue Visual Composer
Admin Web for setup

Video

Streaming video preview
Formats: MJPEG, H.264

Audio

Built-in microphone
Built-in speakers

Wired communication

10/100 BaseT LAN, RJ-45 connector

Power supply

Power over Ethernet (PoE), IEEE 802.3af compatible


Physical

Sleek aluminium body, edge-to-edge front glass
Multisurface, eg. glass wall installation
Compatible with VESA standard 75 mm x 75 mm
Protection IP30
Dimensions 199 x 120 x 23 mm / 7.8" x 4.7" x 0.9"
Weight 0.8 kg / 1.8 lb

Environment conditions

Operating temperature 10° to 40° C
Storage temperature 0° to 60° C
Relative humidity 10% to 90% non-condensing

Mechanical Description

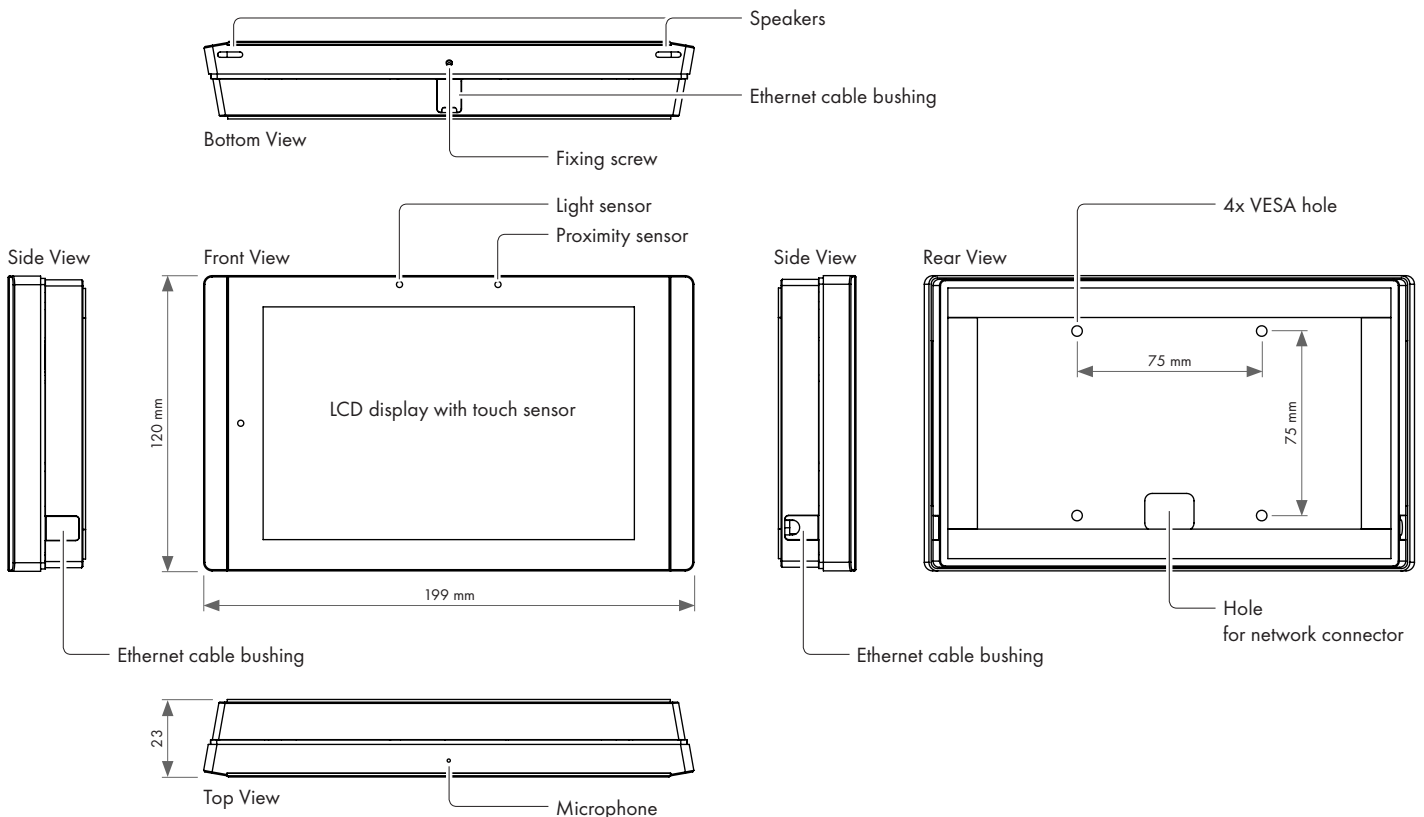

Box Contents

Touch panel touchCUE-7-M
Fixing screw
Power supply with PoE injector
Cleaning tissue
Ethernet cable

Adhesive foil
Squeegee
Data Sheet
Declaration of Conformity
Cue System Connector Wiring Sheet

Order Information

Product code CS0539