

keypadCUE-55

Small 8-Button Keypad 55 x 55 mm



White aluminium
RAL9006



Pure white
RAL9010

Main Features

- Compact keypad equipped with eight buttons
- Programmable LED indication in each button
- Changeable user defined button's label with backlight
- Aluminum enclosure
- Enclosure colors: white aluminium RAL9006 or pure white RAL9010
- Small dimensions 55 x 55 mm
- Compatible with standard electrical wall boxes
- Compatible with frames 55 x 55 mm
- RS-485 data communication
- Power supply 24 VDC
- Wall mounting adapter included
- Plastic white frame included


Description

The keypadCUE-55 is a fully customizable button control panel compatible with all CUE's controllers. This easy to use control interface connects to controllers to offer a wide variety of functions such as display on and off, input switching, volume and mute control, etc. The keypad provides eight buttons and programmable indication in each button.

Every button can be configured for any function. User defined button's label can be printed on a printer and inserted into the keypad. Featuring a beautiful architectural finish, these keypad is an elegant and powerful wall mounted control panel designed to be installed onto a standard European electrical wall box as well as into a cable enclosure.


Wall Installation

- Fully compatible with standard electrical wall boxes
- Wall adapter for simple and quick installation
- White plastic frame supplied as an accessory
- One cable connection

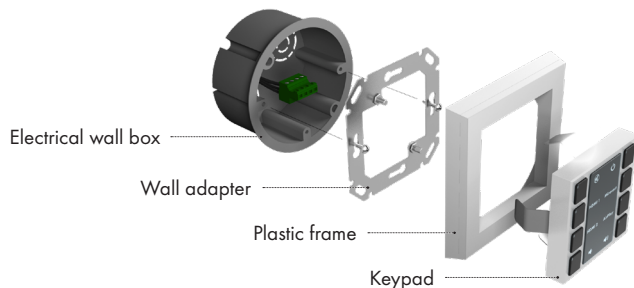


Interconnection Tabletop Box Installation

- Suitable for simple room control systems
- Fully compatible with PANCONNECT interconnection tabletop boxes
- Simple installation using flexible clips, no screws
- Button's label with backlight for poor lighting conditions

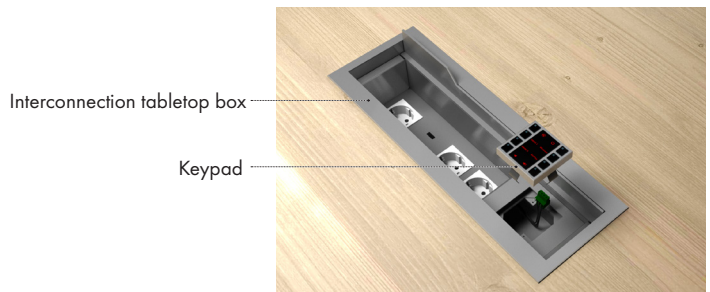


Multiple Keypads

- More keypads connected to one controller
- All keypads connected via RS-485, CATx cable can be used
- More keypads in the room, e.g. one on the wall, other in the table
- Suitable solution for home automation

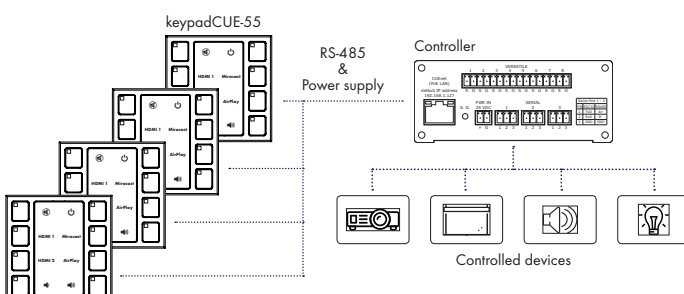

Simple Control System

- Simple and economic control package
- Intuitive user interface provided by keypadCUE-55
- Perfect solution for AV control as well as for and environment control
- Suitable for boardrooms, meeting rooms, classrooms, etc.

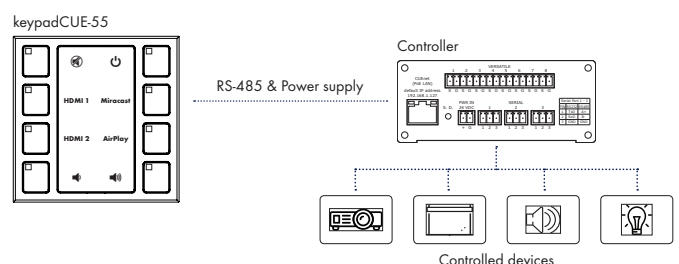

keypadCUE-55

Small 8-Button Keypad 55 x 55 mm



Specifications

Buttons

- 8x black plastic button
- Fully configurable functionality

Indication

- 8x programmable red LED in each button
- Variable brightness

Button's label

- Red backlight with variable brightness
- Black background and white characters recommended
- Print on a printer or use 3M ScotchMark laser markable label stock 7847 - two layer film designed for the production of labels in laser marking facilities.

System communication

- RS-485, 4-pin connector

Power supply

- 24 VDC (+/- 20%), 2 W

Physical

- Aluminium enclosure
- Enclosure colors: white aluminium RAL9006 or pure white RAL9010
- Protection IP30
- Dimensions 55 x 55 x 10.5 mm / 2.2" x 2.2" x 0.4"
- Weight 0.09 kg / 0.2 lb

Operating environment

- Temperature 10° ÷ 40° C
- Humidity 10% ÷ 90% non-condensing


Environment conditions

- Operating temperature 10° ÷ 40° C
- Storage temperature 0° ÷ 60° C
- Relative humidity 10% ÷ 90% non-condensing

Supplied accessories

- 4-pin, 3.5 mm cable connector
- Wall mounting adapter
- Plastic frame, white color

Mechanical Description

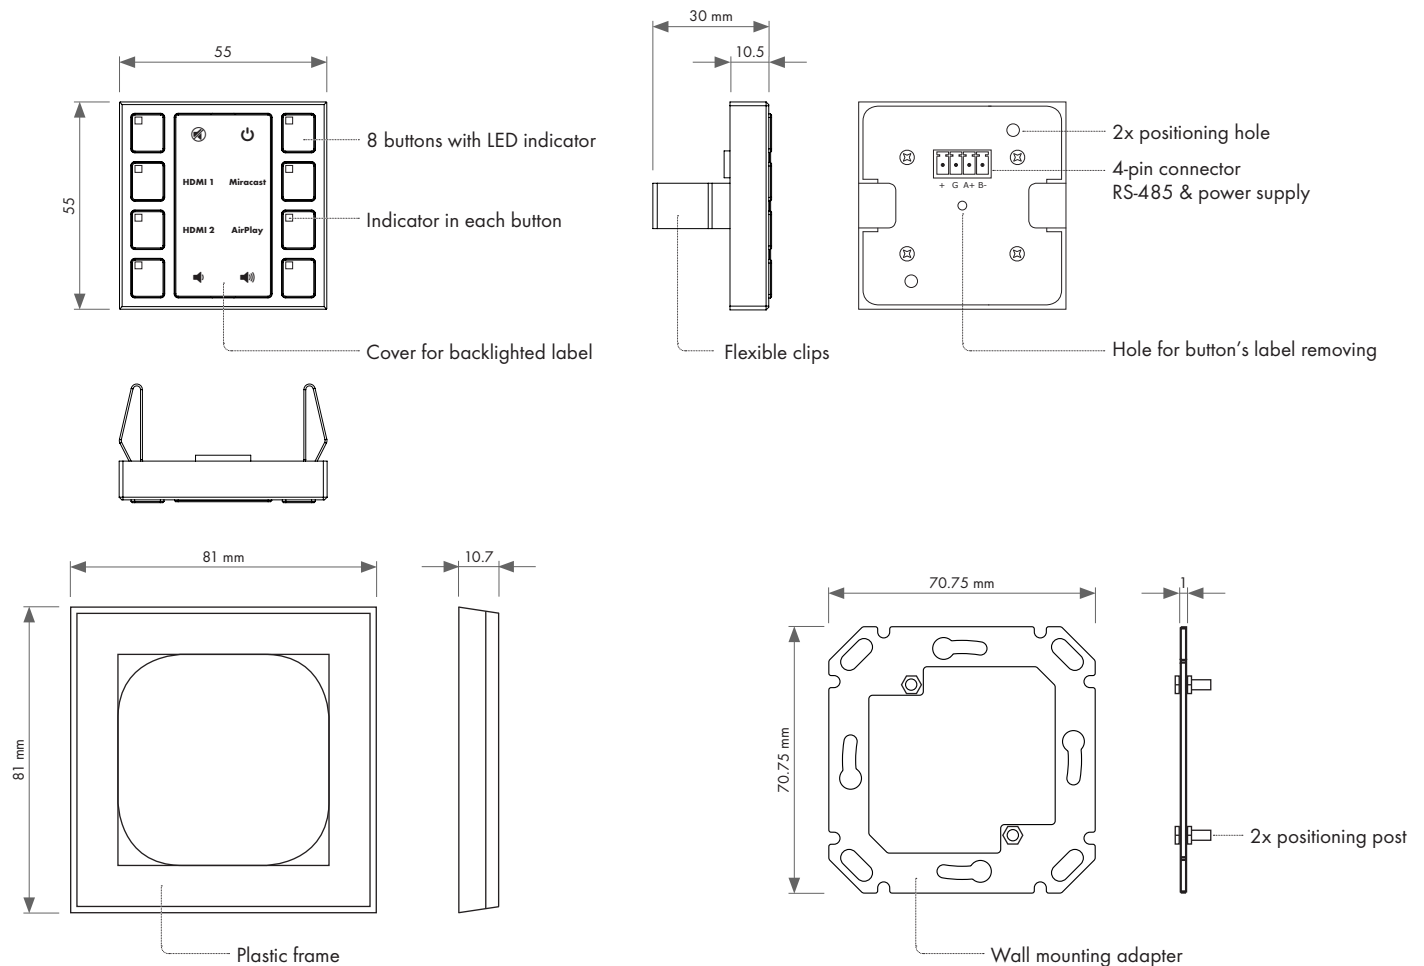

Box Contents

- Keypad keypadCUE-55
- 4-pin cable connector
- Wall mounting adapter
- Plastic white frame
- Data Sheet
- Declaration of Conformity
- Cue System Connector Wiring Sheet

Order Information

Product codes

- CS0542-9006 white aluminium RAL9006 enclosure
- CS0542-9010 pure white RAL9010 enclosure